


**KAISAI** 

# FLY

## FUTURE TECHNOLOGY

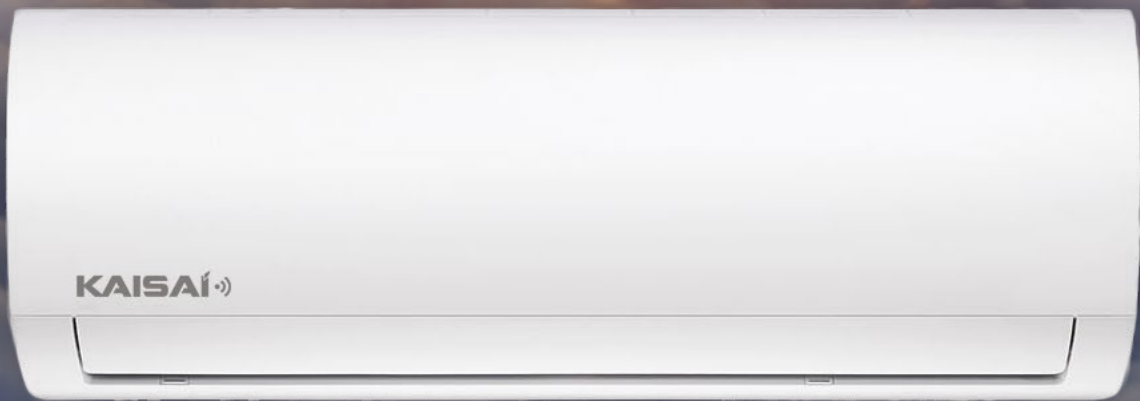

**AIR CONDITIONING**  
WITH ECOLOGICAL REFRIGERANT R32

**A+++**

ENERGY EFFICIENCY



WIFI STANDARD

**R32**

ECOLOGICAL  
REFRIGERANT



WIDE RANGE OF OPERATING  
TEMPERATURES



MULTI

MULTIFUNCTIONAL  
REMOTE CONTROLLER

kaisai.com



## MOST IMPORTANT FUNCTIONS



### R32 ECOLOGICAL REFRIGERANT

R32 offers low GWP (Global Warming Potential) index, better cooling/heating capacity and volumetric efficiency. The volumetric capacity of R32 is 20% higher than for R410A, which means much lower refrigerant volume charged to the system.

### A++ ENERGY EFFICIENCY

The energy saving technology allows to operate in eco mode, what brings up to 70% savings compared to conventional mode.

### WIFI STANDARD

Thanks to the WiFi module the air conditioning can be controlled with the use of a mobile phone or tablet.

### WIDE RANGE OF OPERATING TEMPERATURES

Using the modern technologies and new refrigerant R32, the air conditioner has a wide range of outside operating temperatures: -15 +50°C in cooling mode and -25+30°C in heating mode.

### MULTIFUNCTIONAL REMOTE CONTROLLER

You can easily set the appropriate air parameters in the room. The remote controller has useful functions like: evaporator self-cleaning (SELF CLEAN), constant heating 8°C (HEATING 8°C), temperature sensor (FOLLOW ME).

## TECHNICAL DATA

MODEL INDOOR	KWX-09HRDI	KWX-12HRDI	KWX-18HRDI	KWX-24HRDI
MODEL OUTDOOR	KWX-09HRDO	KWX-12HRDO	KWX-18HRDO	KWX-24HRDO
Cooling capacity (kW)	2.6(0.9-3.4)	3.5(1.1-4.2)	5.3(1.8-6.1)	7.0(2.1-7.9)
Heating capacity (kW)	2.9(0.8-3.4)	3.8(1.1-4.2)	5.6(1.4-6.7)	7.3(1.6-8.8)
Energy efficiency class cooling/heating	A++/A+	A++/A+	A++/A+	A++/A+
SEER	6.2	6.1	7.1	6.1
SCOP	4	4	4	4
Power consumption cooling (W)	710(100-1240)	1237(130-1580)	1539(140-2360)	2345(160-2960)
Power consumption heating (W)	739(120-1200)	964(100-1580)	1480(200-2410)	2035(260-3140)
Operating current cooling (A)	3.1(0.4-5.4)	5.4(0.5-6.9)	6.9(0.6-10.3)	10.2(0.7-13.3)
Operating current heating (A)	3.2(0.5-5.2)	4.2(0.4-6.9)	6.4(0.9-10.5)	10.2(1.1-13.3)
Air flow of indoor unit (m <sup>3</sup> /h)	520/460/360	600/500/360	840/680/540	980/817/662
Air flow of outdoor unit (m <sup>3</sup> /h)	1700	1700	2500	3000
Operating temp. indoor cooling/heating (°C)	17~32/0~30	17~32/0~30	17~32/0~30	17~32/0~30
Operating temp. outdoor cooling/heating (°C)	-15 +50/-25+30	-15 +50/-25+30	-15 +50/-25+30	-15 +50/-25+30
Sound pressure of indoor unit dB(A)	40/30/26/21	40/34/26/22	44/37/30/25	44.5/42/34.5/28
Sound pressure of outdoor unit dB(A)	55.5	56	56	59.5
Dimensions of indoor unit w/h/d (mm)	805/285/194	805/285/194	957/302/213	1040/327/220
Dimensions of indoor unit w/h/d (mm)	700/550/275	700/550/275	800/554/333	845/702/363
Packing of indoor unit w/h/d (mm)	870/360/270	870/360/270	1035/380/295	1120/310/405
Packing of outdoor unit w/h/d (mm)	815/615/325	815/615/325	920/615/390	965/765/395
Net weight of indoor unit (kg)	7.5	7.5	10	12.3
Net weight of outdoor unit (kg)	22.7	22.7	34	51.5
Gross weight of indoor unit (kg)	9.7	9.7	13	15.8
Gross weight of outdoor unit (kg)	25.2	25.2	36.7	54.5
Pipe diameters gas/liquid (mm)	6.35/9.52	6.35/9.52	6.35/12.7	9.52/15.9
Max. length of installation (m)	25	25	30	50
Max. difference in levels (m)	10	10	20	25
Power supply outdoor unit (V/Hz/Ph)	220-240/50/1	220-240/50/1	220-240/50/1	220-240/50/1
Protection outdoor unit (A)	10	16	16	20
Power supply wires outdoor unit	3x1.5	3x1.5	3x2.5	3x2.5
Control wires indoor - outdoor unit	5x1.5	5x1.5	5x1.5	5x1.5
Factory amount of refrigerant up to 5 m (kg)	0.5	0.5	1	1.6
Extra amount of refrigerant above 5 m (g/m)	12	12	12	24

**KAISAI**